

بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِيْمِ

# Mobile Networking

Mohammad Hossein Manshaei

[manshaei@gmail.com](mailto:manshaei@gmail.com)

| 393



A brief Introduction to ns-2

# **NETWORK SIMULATION**

# Contents

---

1. Introduction to ns-2
2. ns-2 Components
3. Create a Basic ns-2 Model
4. Case Study: WiFi Simulation
5. Simulation Results Analysis  
(Traces and NAM)

# ns-2, the Network Simulator

- ✧ A simulator for communication networks, developed at Lawrence Berkely National Laboratory (LBNL) within VINT Project
- ✧ It fast became a property of the research community
- ✧ Everyone could add its own modules and contribute to its development
- ✧ Downloadable Freely at:  
<http://www.isi.edu/nsnam/ns>
- ✧ Can be installed on Linux and Windows

# ns-2, the Network Simulator

---

- ❖ Academic project over 10 years old
  - freely distributed, open source
- ❖ Maintained by ISI (Information Science Institute - USC)
  - DARPA + NSF projects
- ❖ ~ 200K LoC, ~400 page manual
- ❖ Large user base
  - mostly academics
- ❖ “*de facto*” standard in networking research

# ns-2 Functionality

---

- ❖ Discrete event simulator
- ❖ Traffic models and applications
  - Web, FTP, telnet, audio, sensor nets
- ❖ Transport protocols
  - TCP (Reno, SACK, etc), UDP, multicast
- ❖ Routing and queuing
  - static routing, DV routing, multicast, ad-hoc routing
  - queuing disciplines: drop-tail, RED, FQ
- ❖ Link layer
  - wired, wireless, satellite
- ❖ Infrastructure
  - tracing, visualization, error models, ...
  - modify or create your own modules

# Contents

---

1. Introduction to ns-2
2. ns-2 Components
3. Create a Basic ns-2 Model
4. Case Study: WiFi Simulation
5. Simulation Results Analysis  
(Traces and NAM)

# **ns-2 Components**

---

## I. Pre-processing:

- traffic and topology generators

## 2. nam, the Network AniMator

- visualize Ns (or other) output
- GUI input simple Ns scenarios

## 3. Post-processing:

- simple trace analysis, often in Awk, Perl, or Tcl

Tutorial: <http://www.isi.edu/nsnam/ns/tutorial>

# **ns-2 Software Structure: C++ and OTCL**

---

**Uses two languages:**

**1. C++ for packet-processing**

- 1. per packet processing
- 2. fast to run, detailed, complete control


**2. OTCL for control**

- 1. simulation setup, configuration, occasional actions
- 2. fast to write and change

# ns-2 Software Structure: C++ and OTCL

---

- ❖ Object-oriented, discrete event-driven network simulator
- ❖ Written in C++ and OTcl

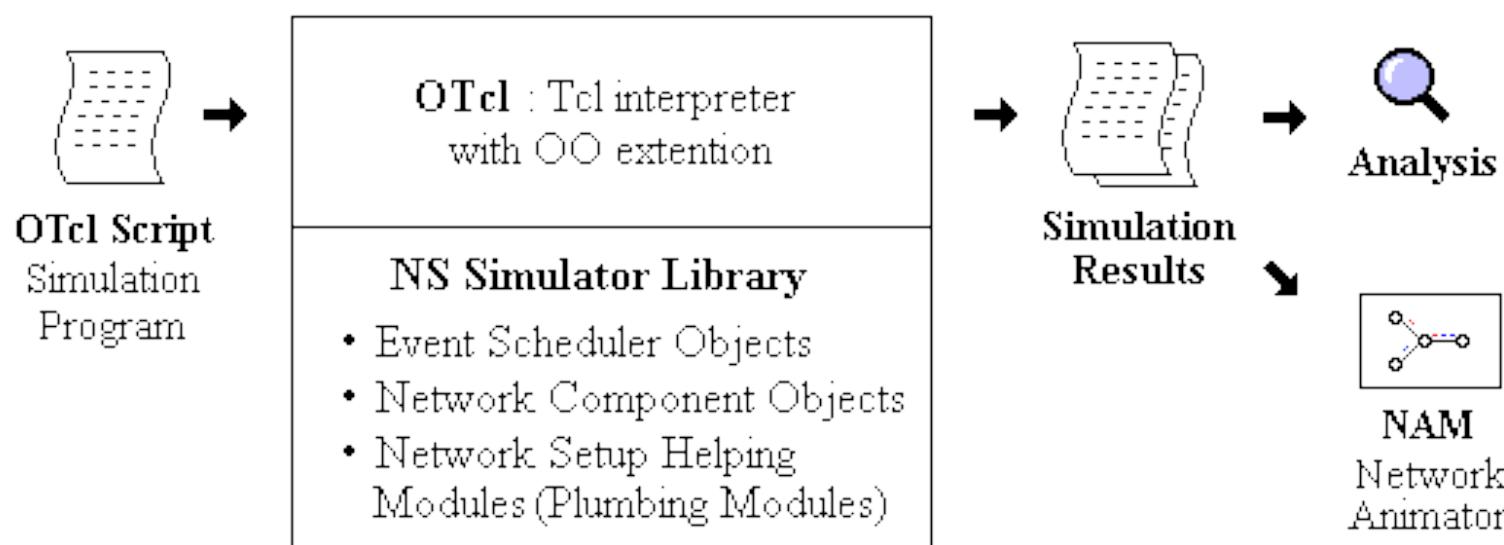

# **Steps when using ns-2**

---

- ❖ **Create OTCL script with network model**
  - nodes, links, traffic sources, sinks, etc.
- ❖ **Parameterize simulation objects**
  - queue sizes, link speeds, TCP flavor and parameters (more than 30)
- ❖ **Collect statistics**
  - dump everything to trace, post process it
  - gather stats during simulation within OTCL script
  - modify Ns source code
- ❖ **Run Ns multiple times**
  - confidence intervals

# Contents

---

1. Introduction to ns-2
2. ns-2 Components
3. Create a Basic ns-2 Model
4. Case Study: WiFi Simulation
5. Simulation Results Analysis  
(Traces and NAM)

# **Creating a Basic Ns Model**

---

- ❖ Create the event scheduler
- ❖ Create nodes and links
- ❖ Create connection
- ❖ Create traffic sources/sinks
- ❖ Enable tracing

# **Creating Event Scheduler**

---

- ❖ **Create scheduler**

- `set ns [new Simulator]`

- ❖ **Schedule event**

- `$ns at <time> <event>`
  - `<event>`: any legitimate ns/TCL commands

- ❖ **Start scheduler**

- `$ns run`

# Creating Network (Nodes + Links)

## ❖ **Nodes**

- set n0 [\$ns node]
- set n1 [\$ns node]

## ❖ **Links: connect together two nodes**

- \$ns duplex-link \$n0 \$n1 <bandwidth> <delay> <queue\_type>
- <delay> determines propagation delay
- <queue\_type> determines queueing policy
  - DropTail, RED, CBQ, FQ, SFQ, DRR

# **Transport and Traffic Models**

---

- ❖ **Two layer approach**

- I. Transports:**

- TCP, UDP, multicast, etc.
- transport protocol instances attach to nodes

- 2. Traffic (applications): (*known as agents*)**

- Web, ftp, telnet, audio, etc.
- application instances attach to transport protocol instances
- generates traffic into transport protocol

# Creating Transport Channels: TCP

---

- ❖ **source and sink**

- `set t_src [new Agent/TCP/Newreno]`
- `set t_dst [new Agent/TCPSink]`
- “Newreno” flavor of TCP

- ❖ **attach to nodes and each other**

- `$ns attach-agent $n0 $t_src`
- `$ns attach-agent $n1 $t_dst`
- `$ns connect $t_src $t_dst`

# **Creating Traffic over TCP Channels**

---

- ❖ **FTP**
- ❖ **create traffic model**
  - set ftp [new Application/FTP]
  - default is “infinite” file size
- ❖ **attach to TCP channel**
  - \$ftp attach-agent \$t\_src
- ❖ **schedule start time**
  - \$ns at <time> “\$ftp start”

# Creating Transport Channels: UDP

---

- ❖ **source and sink**
  - set u\_src [new Agent/UDP]
  - set u\_dst [new Agent/NULL]
- ❖ **attach them to nodes, then connect to each other**
  - \$ns attach-agent \$n0 \$u\_src
  - \$ns attach-agent \$n1 \$u\_dst
  - \$ns connect \$u\_src \$u\_dst

# **Creating Traffic over UDP Channels**

---

## ❖ **CBR**

- `set cbr [new Application/Traffic/CBR]`
- `$cbr set packetSize_ 512`
- `$cbr set interval_ 0.250`
- `$cbr attach-agent $u_src`
- `$ns at <time> "$cbr start"`

# **Other Classes and Variables:**

---

- ❖ **Poisson Source:**

- Set poisson [new Application/Traffic/Poisson]
- \$poisson set interval “average-time-between-packets-in-s”
- \$poisson set size “packet-size-in-bytes”

- ❖ **Uniform Random Variable:**

- Set var [new RandomVariable/Uniform]
- \$var set min\_ “left-edge”
- \$var set max\_ “right-edge”
- Puts “\$var value” // print on the screen a random number
- ❖ The entire list of classes and variables can be obtained from the manual, the C++ codes, or the file ns-default.tcl (default values)

# Contents


---

1. Introduction to ns-2
2. ns-2 Components
3. Create a Basic ns-2 Model
4. Case Study: WiFi Simulation
5. Simulation Results Analysis  
(Traces and NAM)

# Case Study: WiFi Simulation

---

- Ad Hoc Network
- 6 nodes and 3 connections
- CBR Traffic over UDP

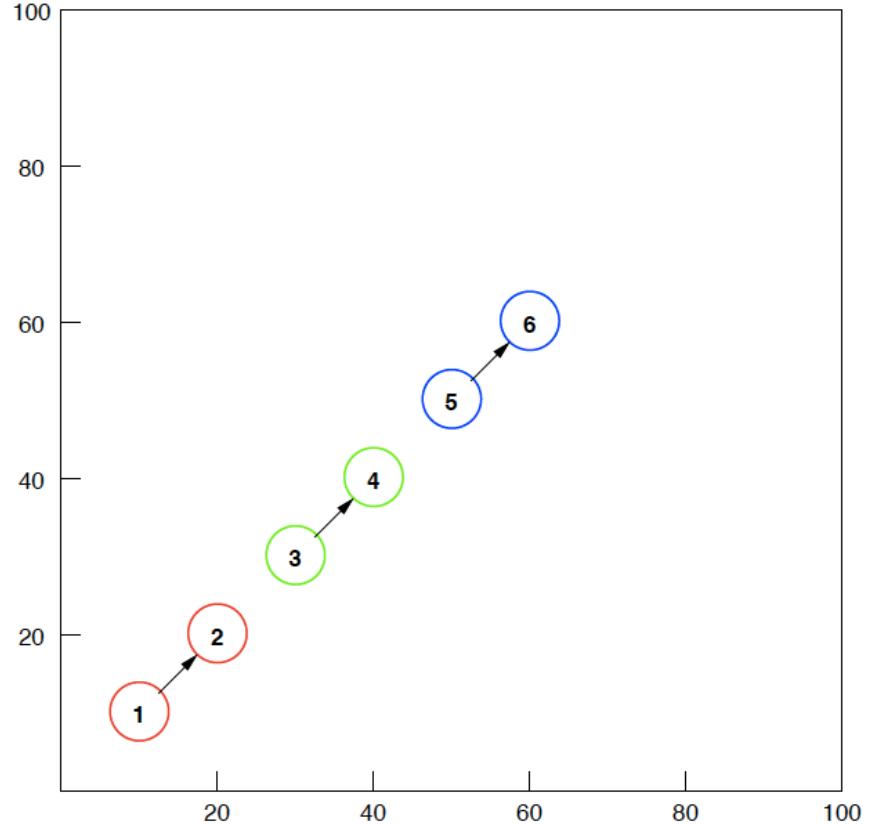

# Make Nodes and their Positions

---

```
for {set i 1} {$i <= $opt(nn)}  
{incr i}  
set WT($i) [ $ns_ node $i ]  
}  
  
proc coord_proc {a} {  
return [expr 10 * $a ]  
}  
  
for {set i 1} {$i <= $opt(nn)}  
{incr i}  
$WT($i) set x_ [coord_proc $i]  
$WT($i) set y_ [coord_proc $i]  
$WT($i) set z_ 0.0  
}
```

# CBR sources over UDP Transport

---

```
for {set i 1} {$i < $opt(nn)} {incr i 2} {
    set udp($i) [new Agent/UDP]
    $ns_ attach-agent $WT($i) $udp($i)

    set sink($i) [new Agent/Null]
    $ns_ attach-agent $WT([expr $i +1]) $sink($i)
    $ns_ connect $udp($i) $sink($i)

    set cbr($i) [new Application/Traffic/CBR]
    $cbr($i) set packetSize_ 1000
    $cbr($i) set interval_ 0.005
    $cbr($i) attach-agent $udp($i)

    $ns_ at [expr 20.0 * $i] "$cbr($i) start"
    $ns_ at $opt(stop) "$cbr($i) stop"
}
```

# Mobile Network Parameters

---

```
$ns_ node-config -adhocRouting DumbAgent \
-l1Type LL \
-macType Mac/802_11 \
-ifqType Queue/DropTail/PriQueue \
-ifqLen 50 \
-antType Antenna/OmniAntenna \
-propType Propagation/FreeSpace \
-phyType Phy/WirelessPhy \
-channelType Channel/WirelessChannel \
-topoInstance $topo \
```

# Trace Definition

---

```
-agentTrace ON \
-routerTrace OFF \
-macTrace OFF \
-movementTrace OFF
```

# Contents


---

1. Introduction to ns-2
2. ns-2 Components
3. Create a Basic ns-2 Model
4. Case Study: WiFi Simulation
5. Simulation Results Analysis  
(Traces and NAM)

# Tracing

- ❖ Trace packets on individual links
- ❖ Tracefile format:

```
<event> <time> <from> <to> <pkt> <size>--<flowid> <src>
<dst> <seqno> <aseqno>
+ 1          0 2 tcp 900 ----- 1 0.0 3.1 7 15
- 1          0 2 tcp 900 ----- 1 0.0 3.1 7 15
r 1.00234 0 2 tcp 900 ----- 1 0.0 3.1 7 15
```

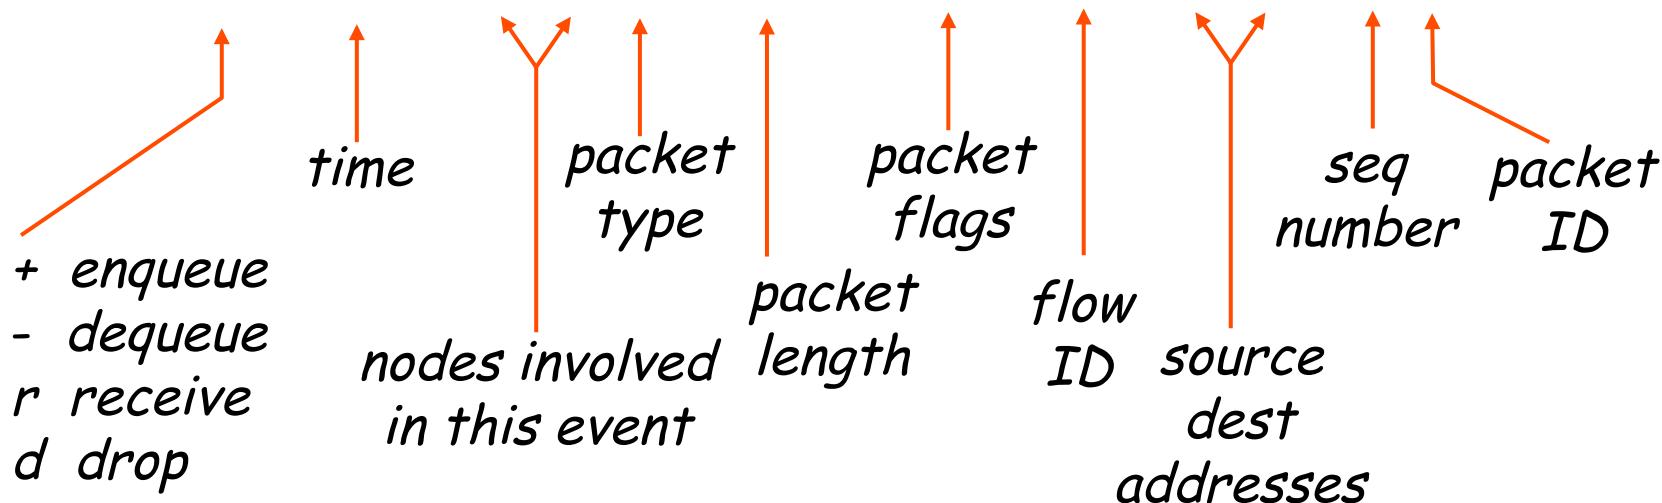


# Ns Trace file : An Example

---


```
...
+ 11.533441 1 2 tcp 1440 ----- 12 1.2 2.4 96 2092
r 11.535694 1 2 tcp 1440 ----- 12 1.2 2.4 65 1527
- 11.537214 1 2 exp 180 ----- 100 0.2 2.13 284 1528
- 11.538654 1 2 cbr 1440 ----- 101 1.11 2.14 155 1530
r 11.547214 1 2 tcp 1440 ----- 12 1.2 2.4 66 1529
+ 11.54728 1 2 tcp 1440 ----- 12 1.2 2.4 97 2095
r 11.548654 1 2 exp 180 ----- 100 0.2 2.13 284 1528
+ 11.55 1 2 cbr 1440 ----- 101 1.11 2.14 211 2096
- 11.550174 1 2 tcp 1440 ----- 12 1.2 2.4 67 1534
r 11.560174 1 2 cbr 1440 ----- 101 1.11 2.14 155 1530
- 11.561694 1 2 exp 180 ----- 100 0.2 2.13 285 1532
+ 11.56222 1 2 tcp 1440 ----- 12 1.2 2.4 98 2097
- 11.563134 1 2 tcp 1440 ----- 12 1.2 2.4 68 1537
r 11.571694 1 2 tcp 1440 ----- 12 1.2 2.4 67 1534
r 11.573134 1 2 exp 180 ----- 100 0.2 2.13 285 1532
- 11.574654 1 2 exp 180 ----- 100 0.2 2.13 286 1536
...
...
```

# Throughput Calculation: Our Case

---

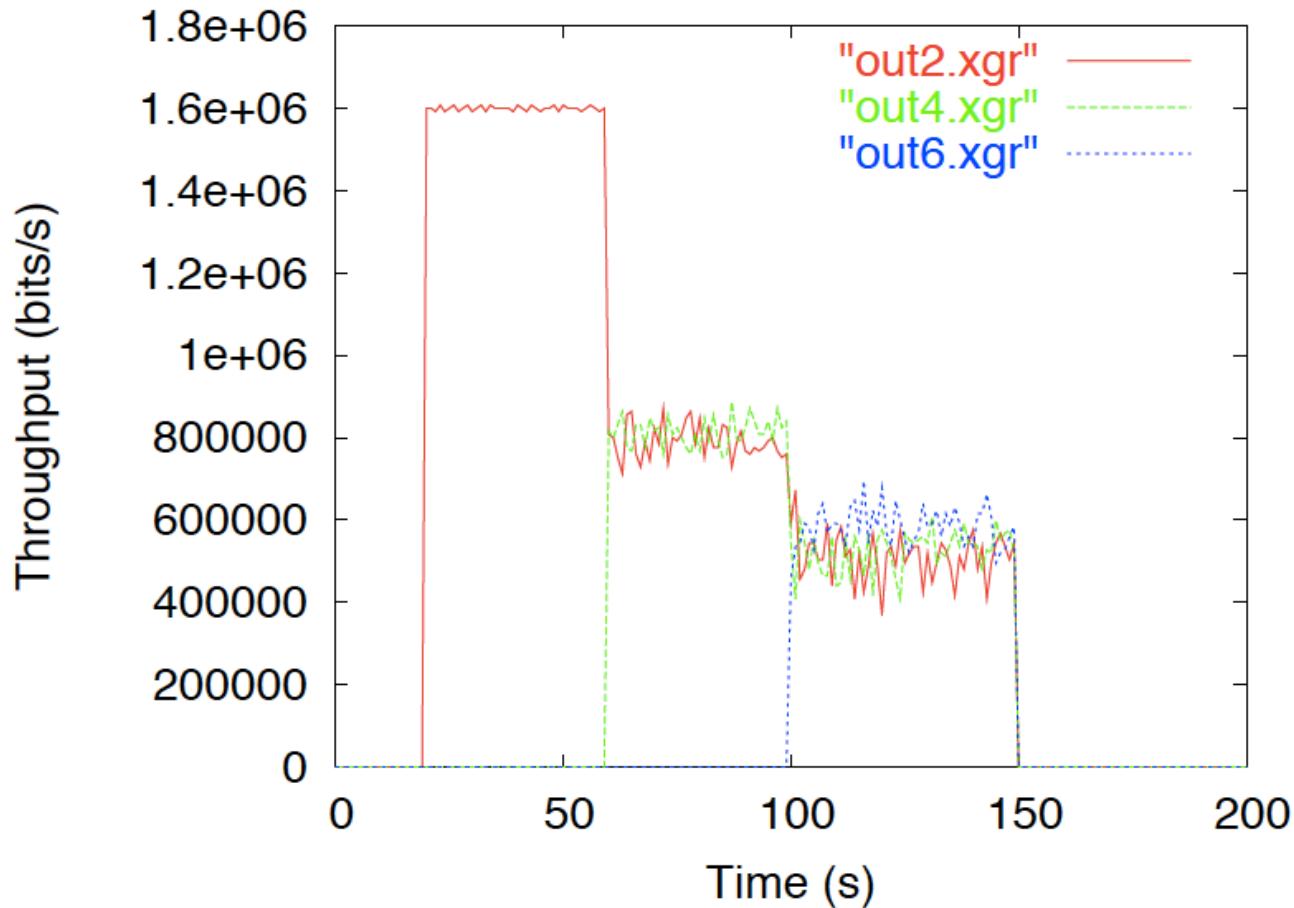

# Graphical Tools

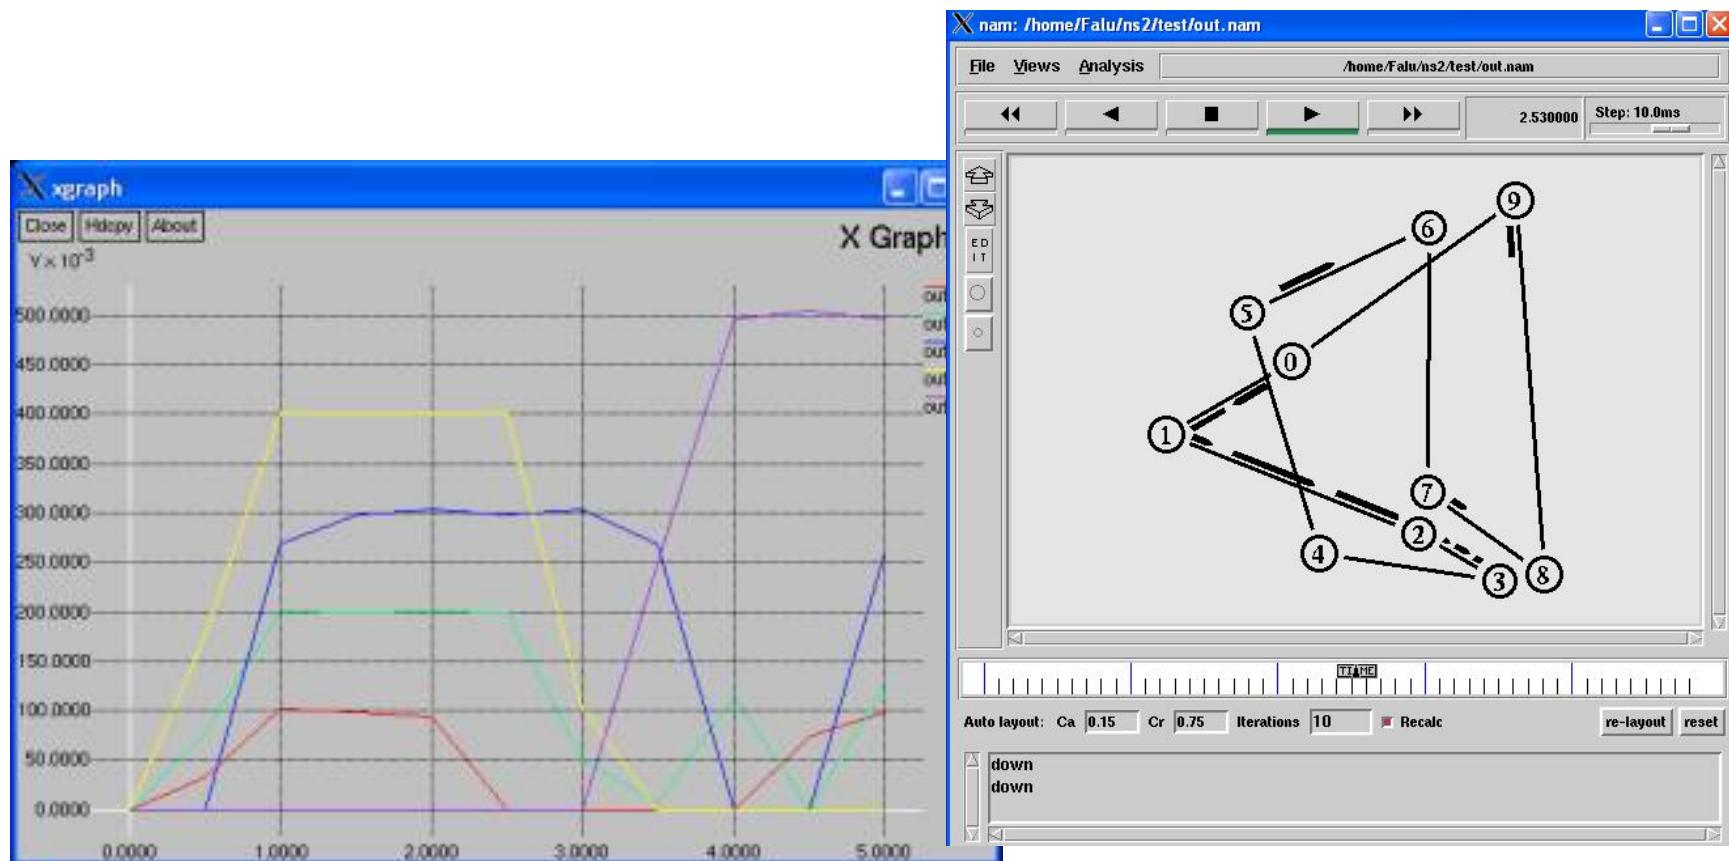

# NAM (Network Animator)

